

NATURE COAT™

OIL BASED UNICOAT™ WOOD COATINGS

5X MORE POWERFUL

THANKS TO REVOLUTIONARY UNIQUE MOLECULAR BINDING TECHNOLOGY

PROTECTION THROUGH BIO-CROSSLINKING AT MOLECULAR LEVEL

THE FUTURE SCIENCE OF PROTECTION AND STAINING FOR EXTERIORS.

BIOEX

PROTECTS AND COLOURS WOODEN SURFACES

A PROUD
INDIAN
PRODUCT

Extensive research and experience of selling a similar product across few territories of India, over 5 years, led to a market-to-manufacturing partnership.

Being manufactured at one of the prime facilities in India, in the protection-product space NATURE COAT - uses the latest international and local expertise with prevailing knowledge and technology.



NATURE COAT OIL ADVANTAGE

1. Health Friendly (for applicator + end-user)
2. Ease of Staining (ready shades through single application)
3. Less Time – More Coverage
4. Retains Natural Beauty
5. Ease of Repair and Renovation

APPLICATION NATURAL ON WOOD

1. Cladding
2. Exterior Doors & Windows
3. Outdoor Furniture
4. Porch Soffit / Under Structure
5. Deck Floor

PROTECT • FINISH • STAIN

HIGH QUALITY OILING FOR FURNITURE, SURFACES & FLOOR



What makes NATURE COAT your default choice for both INTERIOR & EXTERIOR application ?

APPLICATION EASE:

No overlaps during the application and maintenance, no recolouring, dries quickly. Does not form a film, does not flake. Simple, rapid application. Post - application maintenance without sanding.

ECONOMICAL:

Double Coat, contains no solvents or water. 5X more concentrated: 100% of the product acts on the wood/veneer, covering 18-20m²/L in a DOUBLE coat.

AESTHETIC:

Clear coat protects and enhances the natural beauty of wood/veneer or plywood without forming a coat over it. Staining is uniform and easy to create using multiple shades, individually or mixed in desired proportion.

MULTI PURPOSE:

Can be applied to all types of wood: board-leaved, exotic, tropical, conifers, autoclave-treated or heat-treated wood and composites. New or old wood/veneer, plywood & MDF.

CERTIFIED:

Tested in conformity with Standard QUV EN 927-6 (ageing-process accelerator), conforms to Toy Standard EN 71-3. Manufacturer ISO 9001 and ISO 14001 certified.

ENVIRONMENTAL POSITIVE:


Based on natural products, contains no VOCs, formaldehydes, isocyanates. Human Applicator friendly.

THE TECHNOLOGY:

Uses BIO CROSS LINKING technology to ensure that the active oil links with the wood at the molecular level thereby protecting and finishing it well.



SHADES:

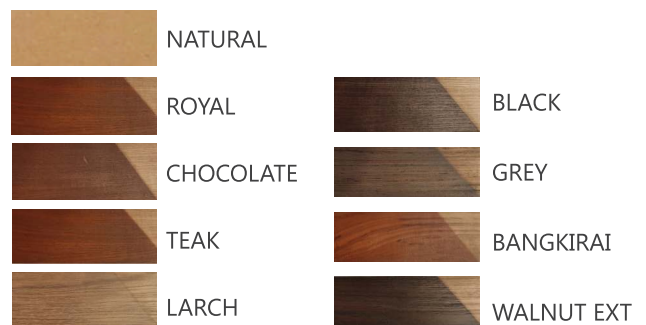

The unique Bio Crosslinking Technology of Exterior Nature Coat Oil gives natural open grains natural touch-feel to wood, it is a Zero VOC (Volatile Organic Compound) – product which makes it ECO FRIENDLY (Safe for Environment) and lasts for longer period of time (Sustainable). And the Bio Crosslinking gives Water Repellent feature to wood coating after curing period of 15days.

CARE & MAINTENANCE OF POLISHED SURFACE

For extra protection to Exterior Nature Coat Oil, Exterior RefreshO should be done over polished surface which is very essential. It can be applied after about 15 days of application for better protection and to give a satin finish to the surface.

OR

It is necessary to apply Exterior Nature Coat Oil at regular intervals as and when needed to resist the ageing process.

Avoid Application of Exterior Nature Coat Oil during rainy season.



- 18-20m²/L per Litre
- Double Coat
- Eco-Friendly
- Professional Quality
- Open Grained Polish



SHAKE THE CONTAINER WELL BEFORE USE



ido.graph



LAXMI TRIDENT

1st Floor, Himalaya Emerald, Nr. IOC Petrol Pump,
132 ft. ring road, Shivranjani, Ahmedabad-380015.

☎ 9179 4003 8802 E naturecoat@gmail.com

W naturecoat.in f @/naturecoatindia

Where Quality is Promoted..

DEALERS DETAILS

